

DESCRIPTION

TRACKING CONTROL APPARATUS AND METHOD, AND
SIGNAL PROCESSING APPARATUS

5

TECHNICAL FIELD

The present invention relates to a tracking control
apparatus and method which allow improving a precision of
10 tracking control, and a signal processing apparatus.

BACKGROUND ART

Conventionally, one DVD recorder records or re-
15 produces DVD media of a plurality of types. DVD media include
DVD-RAMs which can be overwritten for several times, DVD-Rs
which can be recorded but cannot be overwritten, DVD-ROMs
of a reproduction-only type, and the like. Their physical
standards are different from each other. Thus, an optimal
20 method for detecting tracking errors is different for each
of the DVD media.

Conventionally, a "phase difference method" and a
"push-pull method" are known as a method for detecting
25 tracking errors.

The phase difference method is a method for detecting
tracking errors by utilizing changes in light quantity caused
by pits or recording marks of optical discs. When, for
30 example, DVD-ROMs and DVD-Rs are reproduced, the phase
difference method is often used for detecting tracking
errors.

The push-pull method is a method for detecting tracking errors by utilizing changes in light quantity caused by guide grooves of optical discs. When, for example, DVD-RAMs are recorded/reproduced or DVD-Rs are recorded, the push-pull method is often used for detecting tracking errors.

Figure 3 shows a structure of a circuit for detecting tracking errors by using the phase difference method.

A received light quantity detection section 301 receives light reflected off an optical disc. The received light quantity detection section 301 is separated into four areas A, B, C, and D by a boundary along a tangent to recording tracks of the optical disc and a boundary along the perpendicular direction. Each of the four areas A, B, C, and D is formed to generate and output a received light quantity signal in accordance with a received light quantity.

An adder 302 adds the received light quantity signal output from the area A of the received light quantity detection section 301 and the received light quantity signal output from the area C of the received light quantity detection section 301. The areas A and C are arranged orthogonal to each other in the received light quantity detection section 301.

An adder 303 adds the received light quantity signal output from the area B of the received light quantity detection section 301 and the received light quantity signal output from the area D of the received light quantity detection section 301. The areas B and D are arranged orthogonal to each other in the received light quantity detection section

301.

5 A phase comparator 304 detects a phase difference between the signal output from the adder 302 and the signal output from the adder 303. The phase comparator 304 generates a tracking error signal in accordance with the phase difference.

10 Figure 4 shows a structure of a circuit for detecting tracking errors by using the push-pull method.

15 A received light quantity detection section 401 has the same structure as the received light quantity detection section 301 shown in Figure 3. Specifically, the received light quantity detection section 401 receives light reflected off an optical disc. The received light quantity detection section 401 is separated into four areas A, B, C, and D by a boundary along a tangent to recording tracks of the optical disc and a boundary along the perpendicular direction. Each
20 of the four areas A, B, C, and D is formed to generate and output a received light quantity signal in accordance with a received light quantity.

25 An adder 402 adds the received light quantity signal output from the area A of the received light quantity detection section 401 and the received light quantity signal output from the area B of the received light quantity detection section 401. The areas A and B are on the same side with respect to the boundary along the tangent to the recording
30 tracks.

An adder 403 adds the received light quantity signal output from the area C of the received light quantity detection

section 401 and the received light quantity signal output from the area D of the received light quantity detection section 401. The areas C and D are on the same side with respect to the boundary along the tangent to the recording tracks.

A subtracter 404 generates a tracking error signal by subtracting the signal output from the adder 403 from the signal output from the adder 402.

In a DVD mult drive which requires implementing both of the tracking error detection methods, i.e., the phase difference method and the push-pull method, the received light quantity detection section is shared by the phase difference method and the push-pull method in order to reduce the size and the cost of an optical head. Such a mult drive employs a structure in which the operational circuits following the received light quantity detection section are switched depending upon whether the error detection method is the phase difference method or the push-pull method. Such a structure is described in, for example, page 9 of Japanese Laid-Open Publication No. 2002-109759 and pages 2-4 of Japanese Laid-Open Publication No. 5-325233.

In such a structure, a circuit for detecting tracking errors using the phase difference method has to be able to detect changes in light quantity caused by pits or recording marks of the optical discs. Thus, the circuit is the one which can respond to a high frequency band. For example, in the case of DVDs, the circuit is the one which can respond to the frequency band from few MHz to as high as several tens of MHz.

When the received light quantity detection section is shared by the phase difference method and the push-pull method as described above, the response frequency of the received light quantity detection section is high. When recording is performed in a DVD multitrack drive, usually, a laser power is modulated. A high frequency component from tens of MHz to hundreds of MHz such as the modulation component of the laser power is superimposed on the tracking error signal.

10

Usually, the tracking error signal passes through a low-pass type filter called an antialiasing filter for digital control. Thus, high-frequency components of the tracking error signal are removed by the antialiasing filter. Therefore, even though the above-mentioned high-frequency component is superimposed on the tracking error signal, this does not cause any problem.

15

However, as power of laser for recording has increased for increasing the speed of the recording operation, it has become more apparent that it is necessary to account for influence of the above-mentioned high-frequency component on the tracking control though the experiments of the present inventors. This is because it was found that the above-mentioned high-frequency component saturate the operational circuits, and the amplitude of the tracking error control which passes through the antialiasing filter becomes small, causing a control loop gain to be lowered and unstable.

25

The object of the present invention is to provide a tracking control apparatus and method which allow improving a precision of tracking control and a signal processing apparatus.

30

DISCLOSURE OF THE INVENTION

5 A tracking control apparatus in an optical disc
apparatus for performing reproduction for an optical disc
capable of reproduction-only and performing re-
10 cording/reproduction for an optical disc capable of re-
cording/reproduction, according to the present invention
comprises: focusing means for forming an optical beam spot
10 on a recording surface of an optical disc by focusing light
beam on the recording surface of the optical disc; moving
means for moving the optical beam spot in a radial direction
of the recording surface of the optical disc; photodetection
15 means having a light receiving surface for detecting light
reflected off the optical disc, in which the light receiving
surface is separated into a plurality of areas, and each
of the plurality of areas is formed to generate a received
light quantity signal in accordance with a received light
20 quantity and to output the received light quantity signal;
a filter section including a plurality of low-pass filters,
in which each of the plurality of low-pass filters removes
a component having a frequency equal to or higher than a
predetermined cutoff frequency from a corresponding received
25 light quantity signal among a plurality of the received light
quantity signals output from the photodetection means; a
switching section for selectively outputting one of a
plurality of signals output from the low-pass filters and
a plurality of signals output from the plurality of areas
30 of the photodetection means; a tracking error detection
section for generating a tracking error signal indicating
an amount of deviation of the optical beam spot from a track
to be scanned on the recording surface of the optical disc
by performing a predetermined calculation with respect to

a plurality of signals output from the switching section;
and a tracking control section for driving the moving means
such that the optical beam spot follows the track on the
recording surface of the optical disc in accordance with
5 the tracking error signal, thereby achieving the
above-described object, wherein the switching section
provides the signals output from the photodetection means
to the tracking error detection section when an optical disc
inserted into the optical disc apparatus is the optical disc
10 capable of reproduction-only, and provides the signals output
from the filter section to the tracking error detection
section when an optical disc inserted into the optical disc
apparatus is the optical disc capable of re-
cording/reproduction.

15

The optical disc capable of reproduction-only may
be a DVD (Digital Versatile Disc)-ROM and/or a finalized
DVD-R and/or a finalized DVD+R and/or a finalized DVD-RW
and/or a finalized DVD+RW and/or a BD (Blu-ray Disc)-ROM
20 and/or a HDDVD (High Definition DVD)-ROM.

A tracking control method according to the present
invention is a tracking control method performing tracking
control by using a tracking control apparatus included in
25 an optical disc apparatus for performing reproduction for
an optical disc capable of reproduction-only and performing
recording/reproduction for an optical disc capable of
recording/reproduction, wherein the tracking control
apparatus includes: focusing means for forming an optical
30 beam spot on a recording surface of an optical disc by focusing
light beam on the recording surface of the optical disc,
moving means for moving the optical beam spot in a radial
direction of the recording surface of the optical disc; and

photodetection means having a light receiving surface for detecting light reflected off the optical disc, in which the light receiving surface is separated into a plurality of areas, and each of the plurality of areas is formed to
5 generate a received light quantity signal in accordance with a received light quantity and to output the received light quantity signal, the tracking control method comprising the steps of: using a filter section including a plurality of
10 low-pass filters to remove a component having a frequency equal to or higher than a predetermined cutoff frequency from each of a plurality of the received light quantity signals output from the photodetection means; generating a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface
15 of the optical disc by performing a predetermined calculation with respect to a plurality of signals output from the photodetection means when an optical disc inserted into the optical disc apparatus is the optical disc capable of reproduction-only; generating a tracking error signal
20 indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc by performing a predetermined calculation with respect to a plurality of signals output from the filter section when an optical disc inserted into the optical disc
25 apparatus is the optical disc capable of recording/reproduction; and driving the moving means such that the optical beam spot follows the track on the recording surface of the optical disc in accordance with the tracking error signal, thereby achieving the above-describe object.

30

A signal processing apparatus according to the present invention is a signal processing apparatus used in a tracking control apparatus included in an optical disc

apparatus for performing reproduction for an optical disc capable of reproduction-only and performing recording/reproduction for an optical disc capable of recording/reproduction, wherein the tracking control apparatus includes: focusing means for forming an optical beam spot on a recording surface of an optical disc by focusing light beam on the recording surface of the optical disc, moving means for moving the optical beam spot in a radial direction of the recording surface of the optical disc; and photodetection means having a light receiving surface for detecting light reflected off the optical disc, in which the light receiving surface is separated into a plurality of areas, and each of the plurality of areas is formed to generate a received light quantity signal in accordance with a received light quantity and to output the received light quantity signal, the signal processing apparatus comprising: a filter section including a plurality of low-pass filters, in which each of the plurality of low-pass filters removes a component having a frequency equal to or higher than a predetermined cutoff frequency from a corresponding received light quantity signal among a plurality of the received light quantity signals output from the photodetection means; a switching section for selectively outputting one of a plurality of signals output from the low-pass filters and a plurality of signals output from the plurality of areas of the photodetection means; a tracking error detection section for generating a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc by performing a predetermined calculation with respect to a plurality of signals output from the switching section; and a tracking control section for driving the moving means such that the optical beam spot follows the track on the

recording surface of the optical disc in accordance with the tracking error signal, thereby achieving the above-describe object, wherein the switching section provides the signals output from the photodetection means to the tracking error detection section when an optical disc inserted into the optical disc apparatus is the optical disc capable of reproduction-only, and provides the signals output from the filter section to the tracking error detection section when an optical disc inserted into the optical disc apparatus is the optical disc capable of recording/reproduction.

The optical disc apparatus according to the present invention includes a filter section removing high-frequency band components immediately after a received detection section, the filter is operated for a disc capable of recording/reproduction which does not require high-frequency band components when generating a tracking error signal, and the filter is not operated for a disc capable of reproduction-only which requires high-frequency band components. Thus, unnecessary components due to modulation components of laser power (recording power) can be removed, while remaining components of the tracking error signal necessary for the tracking control. As a result, a precision of the tracking control or the focus control can be improved.

The optical disc apparatus according to the present invention is useful as a DVD multi-recorder, DVD multdrive or the like. Further, the present invention can be also applied to any type of optical disc apparatuses recording/reproducing multiple media, not limited to DVDs.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a diagram showing a structure of the optical disc apparatus according Embodiment 1 of the present invention.

Figure 3 is a diagram showing a structure of a circuit for detecting tracking errors by using a phase difference method.

Figure 4 is a diagram showing a structure of a circuit for detecting tracking errors by using a push-pull method.

The description of the reference numerals are as follows:

- 1 Optical disc
- 2 Laser diode
- 3 Collimate lens
- 4 Beam splitter
- 5 Objective lens
- 6 Received light quantity detection section
- 101 Lens driving section
- 102 Control signal generation section
- 103 Switching control section
- 104 Tracking error detection section
- 105 Switching section
- 106 Filter section
- 107 Band control section
- 108 Disc determination section
- 109 Management section
- 301, 401 Received light quantity detection section
- 302, 303, 402, 403 Adder
- 304 Phase comparator

404 Subtractor

BEST MODE FOR CARRYING OUT THE INVENTION

5 Hereinafter, embodiments of the present invention
will be described with reference to the drawings.

(Embodiment 1)

10 Figure 1 shows a structure of an optical disc
apparatus according to Embodiment 1 of the present invention.

A laser diode 2 outputs laser light.

15 A collimate lens 3 converts the light output from
the laser diode 2 into parallel light.

A beam splitter 4 transmits the parallel light from
the collimate lens 3 through an objective lens 5. The beam
splitter 4 also separates parallel light from the objective
20 lens 5 (light reflected off an optical disc 1) to a direction
of a received light quantity detection section 6.

25 The objective lens 5 focuses the parallel light passed
through the collimate lens 3 and the beam splitter 4 to a
recording surface of the optical disc 1 and forms an optical
beam spot on the recording surface of the optical disc 1.
Further, the objective lens 5 converts the light reflected
off the optical disc 1 into parallel light and passes the
parallel light through the beam splitter 4.

30

A lens driving section 101 moves the optical beam
spot formed by the objective lens 5 in a radial direction
of the recording surface of the optical disc 1.

The received light quantity detection section 6 has a light receiving surface for detecting the light reflected off the optical disc 1. The light receiving surface is separated into four areas by a boundary along a tangent to recording tracks of the optical disc 1 and a boundary along the perpendicular direction. Each of the four areas is formed to generate and output a received light quantity signal in accordance with a received light quantity.

A filter section 106 has four sets of low-pass filters (LPF) and equalizers (EQ). The LPFs remove components having frequencies equal to or higher than a predetermined cutoff frequency from a corresponding received light quantity signal from the four received light quantity signals output from four areas of the received light quantity detection section 6 and pass through other components. The EQs amplify and pass components of a predetermined frequency band included in a corresponding received light quantity signal from the four received light quantity signals output from four areas of the received light quantity detection section 6, and removes other components. Further, each of the LPFs is formed such that it is possible to switch the cutoff frequency in accordance with a signal output from a band control section 107.

A disc determination section 108 determines the type of the optical disc 1 mounted on the optical disc apparatus based on the four received light quantity signals output from the four areas of the received light quantity detection section 6.

Different types of the optical discs 1 have different physical standards of the optical discs 1. Difference of the physical standards may be, for example, reflectance of the optical disc 1, depths of the guiding grooves of the recording tracks and the like. Such differences may result in differences in the amplitudes of the four received light quantity signals output from the received light quantity detection section 6 and the mutual relationship between phases may vary depending upon the type of the optical disc 1. The disc determination section 108 determines the type of the disc determination section 108 by detecting such differences.

The disc determination section 108 may determine the type of the optical disc 1 in accordance with a signal other than the four received light quantity signals output from the received light quantity detection section 6. For example, when the optical disc 1 is accommodated in a cartridge having a shape specific to DVD-RAMs, the disc determination section 108 may be formed to determine that the optical disc 1 is a DVD-RAM in accordance with an output signal from a sensor for detecting the shape of the cartridge.

A management section 109 stores information indicating the type of the optical disc 1 determined by the disc determination section 108. Further, the management section 109 stores information indicating whether the optical disc apparatus is in a recording operation state or a reproduction operation state, and stores information indicating a recording speed and information indicating a reproduction speed.

A switching control section 103 outputs signals to a switching section 105 and a tracking error detection section 104 in accordance with the information indicating the type of the optical disc 1 and the information indicating whether the optical disc apparatus is in a recording operation state or a reproduction operation state stored in the management section 109.

The band control section 107 generates a signal for switching the cutoff frequencies of the LPFs of the filter section 106 in accordance with the information indicating the recording speed stored in the management section 109 and outputs the signal to the filter section 106. Specifically, the band control section 107 controls the filter section 106 such that the cutoff frequencies of the LPFs become smaller as the recording speed increases, and the cutoff frequencies of the LPFs become larger as the recording speed decreases.

Table 1 shows an exemplary relationship between the recording speed (rate for recording), the recording power (power of laser light for recording) and the cutoff frequency (cutoff frequencies of the LPFs) when the optical disc 1 is a DVD-RAM.

25

Table 1

For a DVD-RAM

5	Rate for recording	Double speed	Triple speed	Fivefold speed
	Recording power	10 mV	12 mV	14 mV
10	Cutoff frequency	1 MHz	800 KHz	700 KHz

15 Table 2 shows an exemplary relationship between the recording speed (rate for recording), the recording power (power of laser light for recording) and the cutoff frequency (cutoff frequencies of the LPFs) when the optical disc 1 is a DVD-R.

20

Table 2

For a DVD-R

25	Rate for recording	Normal speed	Quadruple speed	Eightfold speed
	Recording power	10 mV	16 mV	26 mV
30	Cutoff frequency	1 MHz	600 KHz	380 KHz

As shown in the tables, as the recording speed (for example, rate for recording) increases, the recording power has to be increased. Accordingly, a disturbance due to a modulation component of the laser power (recording power) becomes larger.

As shown in Tables 1 and 2, by decreasing the cutoff frequency of the LPF as the recording speed increases, it becomes possible to suppress the influence of the disturbance due to modulation component of the laser power (recording power) which becomes larger as the recording speed increases. This is because cutoff effect of the LPF can be improved by decreasing the cutoff frequency of the LPF.

Accordingly, it is significantly practical to decrease the cutoff frequency of the LPF as the recording speed increases (i.e., as the recording power increases) as in the present invention.

Particularly, multi-layer discs such as dual-layer discs require a large recording power by their nature. Thus, the influence of the disturbance due to the modulation component of the laser power (recording power) is large. Therefore, it is very useful to control the cutoff frequency of the LPF as in the present invention.

The switching section 105 has four selectors with two inputs and one output. The one selected from two inputs a and b of each of the selectors is connected to the output of the selector. Outputs of the LPFs are respectively connected to the inputs a of the selectors. Outputs of the EQs are respectively connected to the inputs b of the selectors.

The LPF and the EQ connected to the inputs a and b of one selector is a set of LPF and EQ which receive the same received light quantity signal in the filter section 106.

5 The switching section 105 switches the input of the selector to a or b at the same time in accordance with the signal output from the switching control section 103.

10 The tracking error detection section 104 generates and outputs a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc 1, based on four signals output from the switching section 105.

15 The tracking error detection section 104 includes an operational circuit which handles the phase difference method (not shown) and an operational circuit which handles a push-pull method (not shown). One of the two circuits is selectively used in accordance with the signal output from
20 the switching control section 103.

25 The operational circuit which handles the phase difference method includes the adder 302, the adder 303 and the phase comparator 304 shown in Figure 3. In the operational circuit, four signals output from the switching section 105 are input to the adders 302 and 303 instead of four received light quantity signals output from the received light quantity detection section 301 shown in Figure 3.

30 The operational circuit which handles the push-pull method includes the adder 402, the adder 403 and the subtracter 404 shown in Figure 4. In the operational circuit, four signals output from the switching section 105 are input to

the adders 402 and 403 instead of four received light quantity signals output from the received light quantity detection section 401 shown in Figure 4.

5 A control signal generation section 102 outputs a tracking control signal for making the optical beam spot formed by the objective lens 5 follow the track on the recording surface of the optical disc 1 in accordance with the tracking error signal output from the tracking error detection section
10 104.

 The lens driving section 101 moves the objective lens 5 in a radial direction of the optical disc 1 so that the optical beam spot follows the track on the recording surface
15 of the optical disc 1 in accordance with the tracking control signal output from the control signal generation section 102.

 As described above, the optical disc apparatus shown
20 in Figure 1 function as a tracking control apparatus which performs tracking control.

 The objective lens 5 functions as focusing means for forming the optical beam spot on the recording surface of the optical disc 1 by focusing light beam on the recording
25 surface of the optical disc 1. However, the focusing means is not limited to the objective lens 5. Any one or more elements can be used as focusing means as long as they have a function similar to the function of the above-mentioned
30 focusing means.

 The lens driving section 101 functions as moving means for moving the optical beam spot formed by the objective

lens 5 in a radial direction of the recording surface of the optical disc 1. However, the moving means is not limited to the lens driving section 101. Any one or more elements can be used as moving means as long as they have a function
5 similar to the function of the above-mentioned moving means.

The received light quantity detection section 6 functions as photodetection means having the light receiving surface for detecting the light reflected off the optical
10 disc 1. The light receiving surface is separated into a plurality of areas. Each of the plurality of areas is formed to generate and output a received light quantity signal in accordance with received light quantity. However, the photodetection means is not limited to the received light
15 quantity detection section 6. Any one or more element can be used as photodetection means as long as they have a function similar as the function of the above-mentioned photodetection means.

It is not an essential feature for the present invention that the filter section 106 includes a plurality of equalizers (EQs). As long as the filter section 106 includes a plurality of low-pass filters (LPFs) and each of the LPFs is formed to remove a component having a frequency
20 equal to or higher than the predetermined frequency from a corresponding received light quantity signal among the plurality of received light quantity signals output from the photodetection means, the optical disc apparatus including the filter section 106 is within the scope of the
25 present invention. IF the filter section 106 includes a plurality of LPFs and does not include a plurality of EQs, the switching section 105 is not necessary. In such a case, outputs from the plurality of LPFs are provided to the tracking
30

error detection section 104 all the time. Alternatively, outputs from the plurality of EQs may be provided to the tracking error detection section 104 all the time.

5 The tracking error detection section 104 performs predetermined calculations with respect to the plurality of signals output from the filter section 106 to generate the tracking error signal. How to generate the tracking error signal is not important in the present invention. The
10 tracking error detection section 104 may generate the tracking error signal by using the above-mentioned operational circuits, or may generate the tracking error signal by using any known method.

15 The control signal generation section 102 functions as a tracking control section for driving the lens driving section 101 such that the optical beam spot follows the track on the recording surface of the optical disc 1 in accordance with the tracking error signal.

20 The filter section 106, tracking error detection section 104, and the control signal generation section 102 may be implemented by software by using computer programs or the like, or may be implemented by hardware by using circuits
25 or the like. Alternatively, they can be implemented by the combination of software and hardware. The same is also true of the disc determination section 108, management section 109, band control section 107, switching section 105, and switching control section 103.

30 The lens driving section 101 may be, for example, a mechanical actuator.

An integration circuit may be formed by integrating at least the filter section 106, tracking error detection section 104, and control signal generation section 102 on one semiconductor chip. Such an integration circuit
5 functions as a signal processing apparatus for processing the tracking error signal.

Next, relationships between two methods used for detecting tracking errors in the tracking error detection
10 section 104 (i.e., the phase difference method and push-pull method) and frequency bands of the received light quantity signals will be described.

The phase difference method is used when the optical
15 disc 1 is recorded by pits or recording marks. In such a method, tracking errors are detected by detecting that phase of a component, for which a pit or a recording mark is detected, of the received light quantity signals output from each of the four areas of the received light quantity detection
20 section 6 is different for each of the four areas depending upon a tracking error. Thus, the received light quantity signals when being input to the tracking error detection section 104 have to be signals having high frequency bands in which a pit or a recording mark is detected (more
25 specifically, signals of few MHz to several tens of MHz in the case of DVDs).

The push-pull method is used when the optical disc
1 has guiding grooves. In such a method, tracking errors
30 are detected by detecting that light quantity of primary diffraction, which is diffracted by a guiding groove, of the received light quantity signals output from each of the four areas of the received light quantity detection section

6 is different for each of the four areas depending upon a tracking error. A frequency band of the component for which the guiding groove is detected is same as the frequency band for the optical beam spot to traverse the guiding groove due to decentering of the optical disc and a shift in chucking (more specifically, the band of several tens of kHz or lower in the case of DVDs). Thus, the frequency band of the received light quantity signals when being input to the tracking error detection section 104 may be a band of approximately 100 kHz or below.

For the required frequency band of the received light quantity signals when being input to the tracking error detection section 104 as described above, the frequency band of the laser power modulation components included in the received light quantity signals are about few tens of MHz to several hundreds of MHz in the case of DVDs.

The methods for detecting tracking errors are used as follows, specifically. The phase difference method is used for DVD-ROMs of reproduction-only type. The push-pull method is used for DVD-RAMs for both recording and reproduction. For DVD-Rs, the push-pull method is used for recording, and the phase difference method is used for reproduction.

Regarding components included in the received light quantity signals when being input to the tracking error detection section 104, the optical disc apparatus operates as follows so as to remain components necessary for tracking error detection and remove unnecessary components for tracking error detection from the received light quantity signals when being input to the tracking error detection

section 104. At this stage, "unnecessary components" include the laser power component for recording, components of frequency bands which are not related to tracking error detection, and the like.

5

When the optical disc apparatus is in the recording operation state, or when the optical disc 1 mounted on the optical disc apparatus is a DVD-RAM irrespective of whether the optical disc apparatus is in the recording operation state or the reproduction operation state, the switching control section 103 outputs a signal to the tracking error detection section 104 to employ the push-pull method as the tracking error detection method. The switching control section 103 also outputs a signal to the switching section 105 so that the inputs to the selectors are input from the inputs a. In this way, provided that the cutoff frequency of the LPFs of the filter section 106 are about several hundreds of kHz, only the signal components required for tracking error detection by the push-pull method are remained and tracking error detection can be normally performed.

When the optical disc apparatus is in the reproduction operation state, and the optical disc 1 mounted on the optical disc apparatus is a DVD-ROM or a DVD-R, the switching control section 103 outputs a signal to the tracking error detection section 104 to employ the phase difference method as the tracking error detection method. The switching control section 103 also outputs a signal to the switching section 105 so that inputs to the selectors are input from the inputs b. In this way, provided that amplification frequency bands of the EQs of the filter section 106 are about few MHz to several tens of MHz, only signal components of a predetermined bands of high frequencies required for the tracking error

detection by the phase difference method can be amplified and phase comparison can be precisely performed, and thus, tracking error detection can be normally performed.

5 The recording speed (forexample, rate for recording) is different depending upon intended purpose of the optical disc apparatus and/or the type of the optical disc mounted on the optical disc apparatus. This results in different recording power, tracking control gains, frequency bands
10 required for tracking error detection, and frequency band of the laser power modulation components. Recently, apparatuses which are common for DVD recorders and DVD drives for personal computer are often produced. However, the recording speed is modified as follows so as to conform to
15 the intended purpose of the optical disc drive.

For recording by the DVD recorders, low-speed recording of double speed or lower is used in view of necessary recording speed for recording and making a disc motor quiet.
20 For file transfer by the DVD drives for personal computers or rapid copying by the DVD recorders, rapid recording of double speed to triple speed for DVD-RAMs and quadruple speed to eightfold speed for DVD-Rs is used.

25 Usually, as the recording speed increases, the recording power has to be increased. Accordingly, the disturbance due to the modulation component of the laser power (recording power) becomes large. Thus, it is advantageous for tracking detection to decrease the cutoff
30 frequency and improve the disturbance cutoff effect.

As the recording speed increases, the tracking control gain has to be increased for increasing following

speed of tracking control. Thus, tracking error detection at a high frequency is necessary. Therefore, if the cutoff frequency is lowered too much, the precision of tracking control may be deteriorated.

5

Further, as the recording speed increases, the frequency band of the disturbance due to the modulation component of the laser power (recording power) increases.

10

As described above, components required for the tracking error detection and the frequency band and the size of the unnecessary components are slightly different depending upon the recording speed (for example, the rate for the recording). Therefore, the cutoff frequencies of the LPFs are previously designed for each recording speed to have a balance in two points: the size and the frequency band of the disturbance due to the modulation component of the laser power (recording power), and the cutoff effects of the LPFs; and securing the frequency band required for tracking error detection.

15
20

The band control section 107 outputs a signal for switching the cut-off frequency of the LPFs to the filter section 106 so that the cutoff frequency of the LPFs of the filter section 106 become the previously designed values in accordance with the recording speed set to the optical disc apparatus for recording. The LPFs of the filter section 106 perform an operation to switch the cutoff frequencies in accordance with the signal from the band control section 107. In this way, signal components required for tracking error detection can be remained at a higher precision.

25

30

As described above, according to the present invention, the components required for tracking error detection which are included in the received light quantity signals when being input to the tracking error detection section 104 are remained with a high precision, and components which are unnecessary for tracking error detection, such as laser power component for recording, noise, and the like are removed from the received light quantity signals. In this way, the tracking error detection can be normally performed without saturation of signals in the tracking error detection section 104. As a result, tracking control of a high precision can be performed even for a high-speed recording.

In Embodiment 1, the tracking error detection methods and the frequency bands have been described with reference to examples where the optical disc 1 is one of DVD-RAMs, DVD-Rs, and DVD-ROMs. However, the type of the optical disc 1 is not limited to the above-mentioned DVD discs. Even when the optical disc 1 is an optical disc other than the above-mentioned DVD discs, the present invention can be applied to any type of optical discs by appropriately adjusting the tracking error detection methods and the frequency bands.

Similar to the recording speed (for example, rate for recording), a reproduction speed (rate for reproducing) is different depending upon the intended purpose of the optical disc apparatus and the type of the optical disc mounted to the optical disc apparatus. Thus, not only the cutoff frequencies of the LPFs, but also the amplification frequency bands of the EQs may be modified in accordance with the reproduction speed (rate for reproducing). In this way,

tracking error detection for reproducing can be performed with a high precision, and tracking control of a high precision can be performed.

5 The present invention has been described above with reference to the preferable embodiment of the present invention. However, the present invention should not be construed as being limited to such an embodiment. It should be recognized that the scope of the present invention is
10 only construed by the claims. It should be recognized that those skilled in the art can implement the equivalent scope from the descriptions of the specific preferable embodiment, based on the descriptions of the present invention and common technical knowledge. It is also recognized that the patents,
15 patent applications and documents referred herein are hereby incorporated by reference as if their entirety are described.

INDUSTRIAL APPLICABILITY

20 The optical disc apparatus according to the present invention includes a filter section for removing high-frequency band components immediately after a received detection section, the filter is operated for a disc capable of recording/reproduction which does not require
25 high-frequency band components when generating a tracking error signal, and the filter is not operated for a disc capable of reproduction-only which requires high-frequency band components. Thus, unnecessary components due to modulation components of laser power (recording power) can be removed,
30 while remaining components of the tracking error signal necessary for the tracking control. As a result, a precision of the tracking control or the focus control can be improved.

The optical disc apparatus according to the present invention is useful as a DVD multi-recorder, DVD multidrive or the like. Further, the present invention can be also applied to any type of optical disc apparatuses re-
5 cording/reproducing multiple media, not limited to DVDs.

CLAIMS

1. (Currently Amended) A tracking control apparatus in an optical disc apparatus for performing reproduction for an optical disc capable of reproduction-only and performing recording/reproduction for an optical disc capable of recording/reproduction, comprising:

5 focusing means for forming an optical beam spot on a recording surface of an optical disc by focusing light beam on the recording surface of the optical disc;

10 moving means for moving the optical beam spot in a radial direction of the recording surface of the optical disc;

photodetection means having a light receiving surface for detecting light reflected off the optical disc, in which the light receiving surface is separated into a plurality of areas, and each of the plurality of areas is formed to generate a received light quantity signal in accordance with a received light quantity and to output the received light quantity signal;

20 a filter section including a plurality of low-pass filters, in which each of the plurality of low-pass filters removes a component having a frequency equal to or higher than a predetermined cutoff frequency from a corresponding received light quantity signal among a plurality of the received light quantity signals output from the photodetection means;

25 a switching section for selectively outputting one of a plurality of signals output from the low-pass filters and a plurality of signals output from the plurality of areas of the photodetection means;

30 a tracking error detection section for generating a tracking error signal indicating an amount of deviation

of the optical beam spot from a track to be scanned on the recording surface of the optical disc by performing a predetermined calculation with respect to the plurality of signals output from the switching section; and

5 a tracking control section for driving the moving means such that the optical beam spot follows the track on the recording surface of the optical disc in accordance with the tracking error signal,

 wherein the switching section provides the signals
10 output from the photodetection means to the tracking error detection section when an optical disc inserted into the optical disc apparatus is the optical disc capable of reproduction-only, and provides the signals output from the filter section to the tracking error detection section when
15 an optical disc inserted into the optical disc apparatus is the optical disc capable of recording/reproduction.

2. (Currently Amended) A tracking control apparatus according to claim 1, wherein the optical disc capable of
20 reproduction-only is a DVD (Digital Versatile Disc)-ROM and/or a finalized DVD-R and/or a finalized DVD+R and/or a finalized DVD-RW and/or a finalized DVD+RW and/or a BD (Blu-ray Disc) -ROM and/or a HDDVD (High Definition DVD) -ROM.

25 3.-6. (Cancelled).

7. (Currently Amended) A tracking control method performing tracking control by using a tracking control apparatus included in an optical disc apparatus for performing
30 reproduction for an optical disc capable of reproduction-only and performing recording/reproduction for an optical disc capable of recording/reproduction, wherein

 the tracking control apparatus includes:

focusing means for forming an optical beam spot on a recording surface of an optical disc by focusing light beam on the recording surface of the optical disc,

5 moving means for moving the optical beam spot in a radial direction of the recording surface of the optical disc; and

photodetection means having a light receiving surface for detecting light reflected off the optical disc, in which the light receiving surface is separated into a plurality of areas, and each of the plurality of areas is
10 formed to generate a received light quantity signal in accordance with a received light quantity and to output the received light quantity signal, the tracking control method comprising the steps of:

15 using a filter section including a plurality of low-pass filters to remove a component having a frequency equal to or higher than a predetermined cutoff frequency from each of a plurality of the received light quantity signals output from the photodetection means;

20 generating a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc by performing a predetermined calculation with respect to a plurality of signals output from the photodetection means
25 when an optical disc inserted into the optical disc apparatus is the optical disc capable of reproduction-only;

generating a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc
30 by performing a predetermined calculation with respect to a plurality of signals output from the filter section when an optical disc inserted into the optical disc apparatus is the optical disc capable of recording/reproduction; and

driving the moving means such that the optical beam spot follows the track on the recording surface of the optical disc in accordance with the tracking error signal.

5 8.-12. (Cancelled).

13. (Currently Amended) A signal processing apparatus used in a tracking control apparatus included in an optical disc apparatus for performing reproduction for an optical disc
10 capable of reproduction-only and performing recording/reproduction for an optical disc capable of recording/reproduction, wherein

the tracking control apparatus includes:

15 focusing means for forming an optical beam spot on a recording surface of an optical disc by focusing light beam on the recording surface of the optical disc;

moving means for moving the optical beam spot in a radial direction of the recording surface of the optical disc; and

20 photodetection means having a light receiving surface for detecting light reflected off the optical disc, in which the light receiving surface is separated into a plurality of areas, and each of the plurality of areas is formed to generate a received light quantity signal in
25 accordance with a received light quantity and to output the received light quantity signal, the signal processing apparatus comprising:

30 a filter section including a plurality of low-pass filters, in which each of the plurality of low-pass filters removes a component having a frequency equal to or higher than a predetermined cutoff frequency from a corresponding received light quantity signal among a plurality of the received light quantity signals output from the

photodetection means;

5 a switching section for selectively outputting one of a plurality of signals output from the low-pass filters and a plurality of signals output from the plurality of areas of the photodetection means;

10 a tracking error detection section for generating a tracking error signal indicating an amount of deviation of the optical beam spot from a track to be scanned on the recording surface of the optical disc by performing a predetermined calculation with respect to the plurality of signals output from the switching section; and

15 a tracking control section for driving the moving means such that the optical beam spot follows the track on the recording surface of the optical disc in accordance with the tracking error signal,

20 wherein the switching section provides the signals output from the photodetection means to the tracking error detection section when an optical disc inserted into the optical disc apparatus is the optical disc capable of reproduction-only, and provides the signals output from the filter section to the tracking error detection section when an optical disc inserted into the optical disc apparatus is the optical disc capable of recording/reproduction.

25 14.-18. (Cancelled).

ABSTRACT

To improve a precision of tracking control. A tracking control apparatus includes a filter section (106) including a plurality of low-pass filters (LPFs). Each of the plurality of low-pass filters (LPFs) removes components having frequencies equal to or higher than a predetermined cutoff frequency from a corresponding received light quantity signal among a plurality of received light quantity signals output from light detection means (6). The tracking control apparatus includes: a tracking error detection section (104) for generating a tracking error signal indicating an amount of deviation of an optical beam spot from a track to be scanned on a recording surface of an optical disc by performing predetermined calculations with respect to a plurality of signals output from the filter section (106); and a tracking control section (102) for driving moving means (101) such that the optical beam spot follows the track on the recording surface of the optical disc in accordance with the tracking error signal.

FIG.3

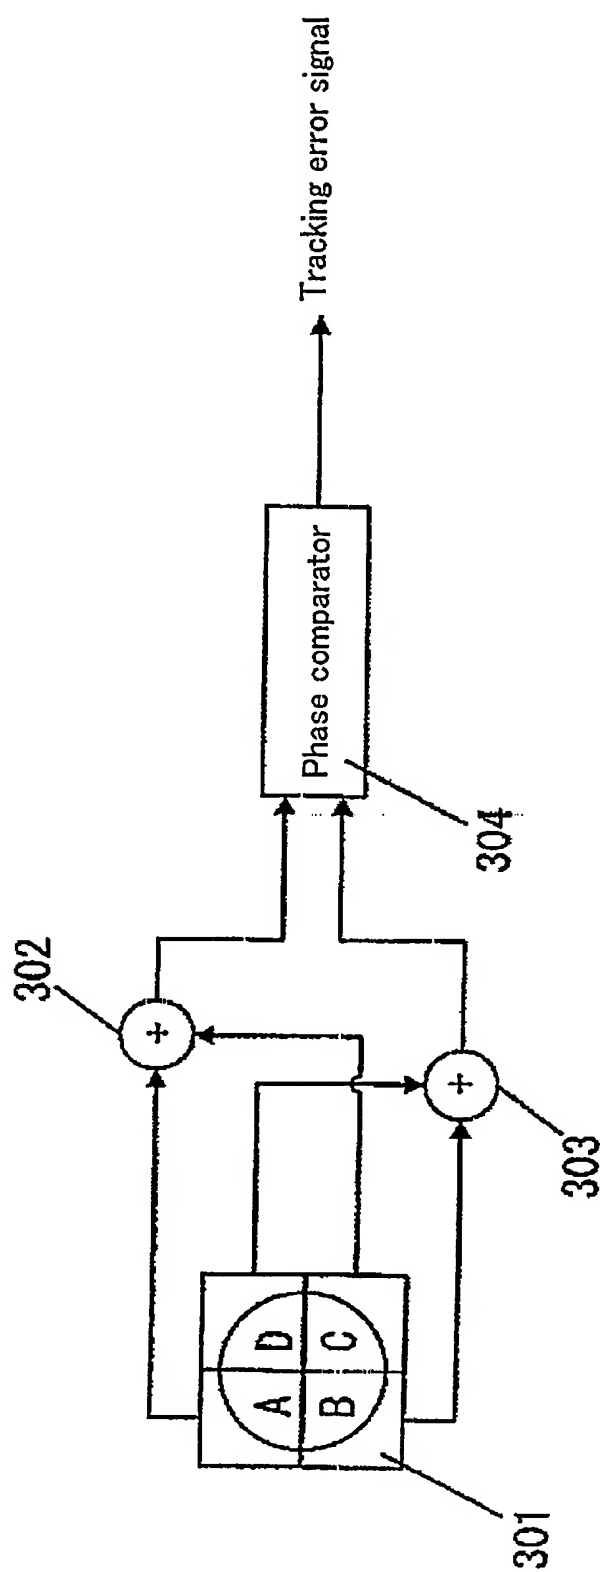


FIG.4

